



## The Answer Advantage

10", 12" and 14" Quick change filter

Catalytic carbon block w/ Magnesium-based adsorbent beads for pH stabilization

### Overview

Quick-change filters are that in every sense of the word. Whether using the quick connect option or 3/8" threaded head, these filters can be changed within a minute. It's as simple as a twist, remove, insert replacement and twist again. This type of filter is recommended for those who's time is a bit more valuable than money. Carbon block filter with Corrtrapp, a Magnesium-based adsorbent bead, which stabilizes the water's pH to help reduce corrosion. By forming a protective coating and passivation, it also offers protection against Chlorides.

Item #	Item Description	Micron	* Chlorine capacity		* *Chloramines capacity	
			GPM	Gallons	GPM	Gallons
SXP-10TAA	10" The Answer Advantage filter CC refill	5.0	1.00	2,000	0.50	1,000
SXP-12TAA	12" The Answer Advantage filter CC refill ext cap	5.0	1.50	3,000	0.75	1,500
SXP-14TAA	14" The Answer Advantage filter CC refill	5.0	2.00	4,000	1.00	2,000

### Benefits

1. Stops corrosion on metal surfaces
2. Neutralizes all acids including CO<sub>2</sub> and Hydrogen Sulfide.
3. Anodic and Cathodic inhibitor
4. Does not cause scaling
5. Safe for environment
6. Stops Chloride corrosion (No need for Reverse Osmosis)
7. Carbon filtration for removal of sediment, dirt, rust, and suspended solids
8. Reduces bad taste & odors Chlorine, Chlorine By-Products and Chloramines\* (catalytic carbon only)

\* All Materials are certified NSF individually 42 and 61\* Not performance tested or certified by NSF or WQA

### Installation and Operational tips

- ✓ Filter must be installed vertically
- ✓ Check inlet pressure is <= 80 psi  
(Higher pressure will push the scale media to the top and become lodged, restricting flow)
- ✓ Flush new cartridge for 10 minutes prior to use
- ✓ Installation of a sediment filter is recommended in front on the filter.
- ✓ 0.5-micron sediment filter for ice machines and espresso equipment. 1 – 5-micron sediment filter (based on water quality) for other kitchen equipment
- ✓ Check the carbon efficiency, by using a Chlorine test strip to test the water. If Chlorine is present, replace the filter.
- ✓ If carbon test shows no traces of Chlorine and flow becomes too slow or restricted, try replacing sediment filter.

Carbon should **ALWAYS** be changed annually even if no traces of Chlorine appear in testing to avoid cross contamination from bacteria growth.

## Notes

Important Notice: Performance claims are based on a complete system, including a filter and connection to a pressurized water source. This filter must be placed in an appropriate system and operated according to the system's specifications in order to deliver the claimed performance. It is essential to follow operational, maintenance, and filter replacement requirements, as directed for each application, for this filter and system to perform correctly. Read the Manufacturer's Performance Data Sheet accompanying the system and change the filter as suggested. The contaminants or other substances removed or reduced by this water filter are not necessarily in all users' water.

1. Performance of a given ScaleX Pro carbon filter varies in direct proportion to the total weight of carbon in each filter.
2. Projected chlorine taste and odor reduction capacity when tested in accordance with NSF / ANSI Standard 42 protocol.
3. Nominal particulate rating is for >85% of a given size as determined from single-pass particle counting results.\*
4. Absolute particulate rating is for >99.9% of particles of a given size as determined from single-pass particle counting results.\*\*
5. Actual results obtained will vary with various combinations of organic contaminants, changes in pH or other conditions encountered in actual use.
6. All information presented here is based on data believed to be reliable. It is offered for evaluation and verification but is not to be considered a warranty of any kind.

\* Nominal Filter Rating: Filter rating indicating the approximate size particle, the majority of which will not pass through the filter. It is generally interpreted as meaning that 85% of the particles of the size equal to the nominal micron rating will be retained by the filter. (WQA Glossary of Terms, Third Edition, 3-97).

\*\* Absolute Filter Rating: Filter rating meaning that 99.9% (or essentially all) of the particles larger than a specific micron rating will be trapped on or within the filter. (WQA Glossary of Terms, Third Edition, 3-97).

## Limited Liability

ScaleX Pro makes no warranties of any kind, expressed or implied, statutory or otherwise, and expressly disclaims all warranties of every kind, concerning the product, including, without limitation, warranties of merchantability and fitness for a particular purpose, except that this product should be capable of performing as described in this product's data sheet.


ScaleX Pro's obligation shall be limited solely to the refund of the purchase price or replacement of the product proven defective, at ScaleX Pro's sole discretion. Determination of suitability of this product for uses and applications contemplated by Buyer shall be the sole responsibility of Buyer. Use of this product constitutes Buyer's acceptance of this Limited Liability.

### Head compatibility:

10" and 14" – Everpure QL2 and QL3

12" – QL1, QL2, QL3, QL3B and Everpure manifold

Omnipure

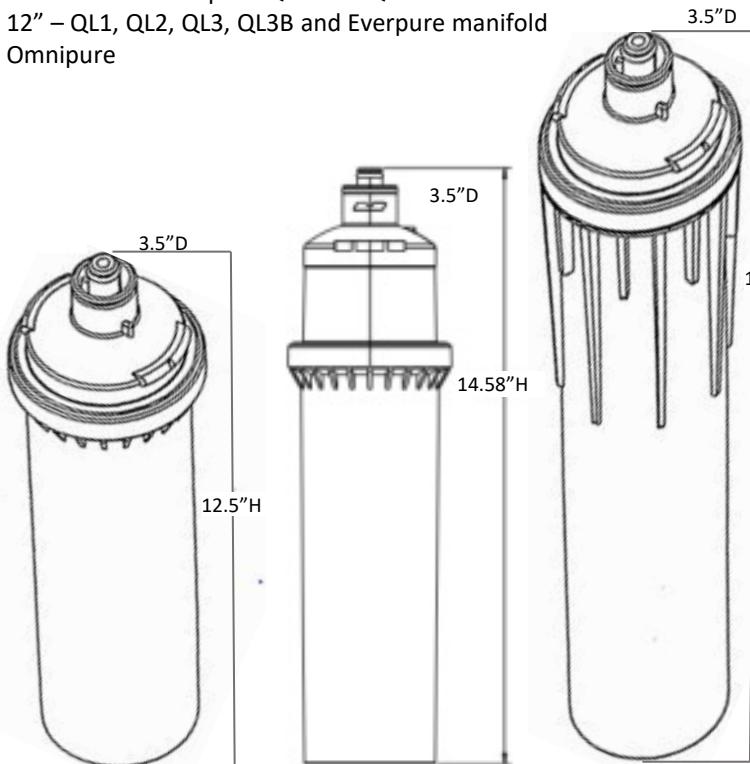

## Specifications

Minimum Operating Temperature:	40° F / 4° C
Maximum Inlet Temperature:	125° F / 52° C
Minimum Operating Pressure:	20 psig / 1.38 bar
Maximum Operating Pressure:	80 psig / 6.9 bar
Maximum Differential Pressure:	60 psig / 4.14 bar
Collapse Pressure:	150 psig / 10.35 bar

ScaleX Pro filters are not to be autoclaved or steam-sterilized. Use only with microbiologically safe and adequately disinfected water



The filter cartridge is tested and certified by NSF International against NSF/ANSI Standard 42 for material safety requirements only.



The filter cartridge is tested and certified by WQA against NSF/ANSI Standard 42 for material safety requirements only.

## Shipping details

### 10" filter

Case count: 12  
Weight: 24 lbs.  
Case dimensions: L: 17" x W: 13" x H: 14"

### 12" filter

Case count: 12  
Weight: 28 lbs.  
Case dimensions: L: 17" x W: 13" x H: 14"

### 14" filter

Case count: 6  
Weight: 28 lbs.  
Each dimensions: L: 18" x W: 14" x H: 17"

**SCALEX PRO**  
WATER

[www.Scalexpro.com](http://www.Scalexpro.com)

Gilbert, AZ 85298

(480) 530-7151 ext. 1